

The *Most Reliable* Undercounter With Pumped Drain & Tank Heat.

ET Series



Pumped Drain
Allows installation
in almost all
applications.

Screens
Dual screening protects
both wash & drain
pumps from debris.

Sustained Heat
Maintains tank
temperature
rack after rack.



Little PowerHouse

Only 34 1/2" Tall with a
14" Door Opening, while
Washing and Rinsing with 1 1/2
HP.



Perfect for Restaurants, Bars, and Fast Food Operations.

At American Dish Service, Quality People, Designs,
and Products have been the foundations of our
organization for over **45 years**.

www.americandish.com



American Dish Service
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free (800) 922-2178** **Phone (913) 422-3700** **Fax (913) 422-6630**

ET Series

MULTI-USE UNDERCOUNTER DISHWASHERS

ET... The Dishmachine of choice, when space is a concern. You will **NEVER AGAIN** have to sacrifice production or results.

- 1 1/2 HP Wash & Rinse Pump
- 90 Second, 2 Minute, and 2 1/2 Minute Time Cycles
- Reliable Tank Heat (Sustained)
- 14" Door Opening
- Automatic Chemical Dispensing
- Optional Chemical Alarms
- Pump Drains Water (up to 20")
- Dual Screening Catches Debris



Operating a free standing complete warewashing center in only 48" of space. Just combine our ET-AF Undercounter with our stainless steel table package.




CAUTION:

Electrical and plumbing connections must be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety codes.


*Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

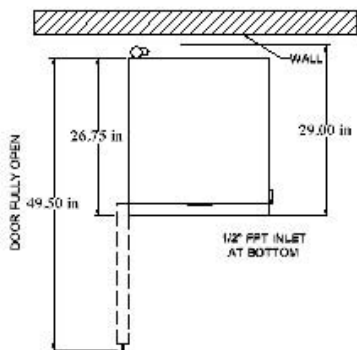

TOP VIEW

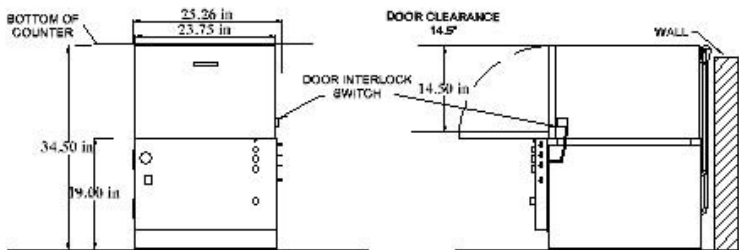

FRONT VIEW

SIDE VIEW

Effective: 7/2012

WWW.AMERICANDISH.COM

Skirted ET Pumped Drain and Heat

ET-AF

FAMILY MODELS

	ET-AF	ET-A	ET-AH
NSF RATED CAPACITY	30	24	20
WASH TIME(Sec.)	45	60	75
RINSE TIME(Sec.)	30	45	60
DWELL (Sec.)	15	15	15
TOTAL CYCLE TIME (Sec.)	90	120	150
WATER TEMPERATURE-SUPPLY WATER		(NSF) 120 F MIN. 49 C MIN.	
WATER CONSUMPTION (NSF RATED)		1.7 Gal's Per Cycle 6.4 Lit's Per Cycle	
MOTOR RATING (PUMP)		1.5 HP 1.125 KW	
DRAIN MOTOR RATING		1/20 HP .037 KW	
SUSTAINER HEATER		1/2 KW	
ELECTRICAL RATINGS (NEC)		15 VAC, 20 Amp BRKR 50/60 Hz, 1 Phase	
Connect to Supply Source using 10-12 AWG Copper Wires using Non-Time Delay Fuse of 20 Amp rating or 20 Amp Circuit Breaker.			
RACK SIZE		19.75" x 19.75" 50.2 cm x 50.2 cm	
DOOR CLEARANCE		14.5" x 22.25" 27.9 cm x 56.5 cm	
WATER INLET		1/2" FPT	
DRAIN SIZE		3/4" I.D. Hose by 60" Lg.	
PUMP-OUT HEIGHT (Maximum)		20"	
MACHINE HEIGHT		Min 33.5"- Max 34.5" 85.1 to 87.6 cm	
WIDTH (Overall)		25.5" 64.8 cm	
DEPTH (Overall)		29.0" 73.6 cm	
SHIPPING WEIGHT		201 lb. 91.2 kg	
SHIPPING VOLUME (Crated)		28.6 cu. ft. .8 cu. m.	

Copyright: 7/2012

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.